


GE

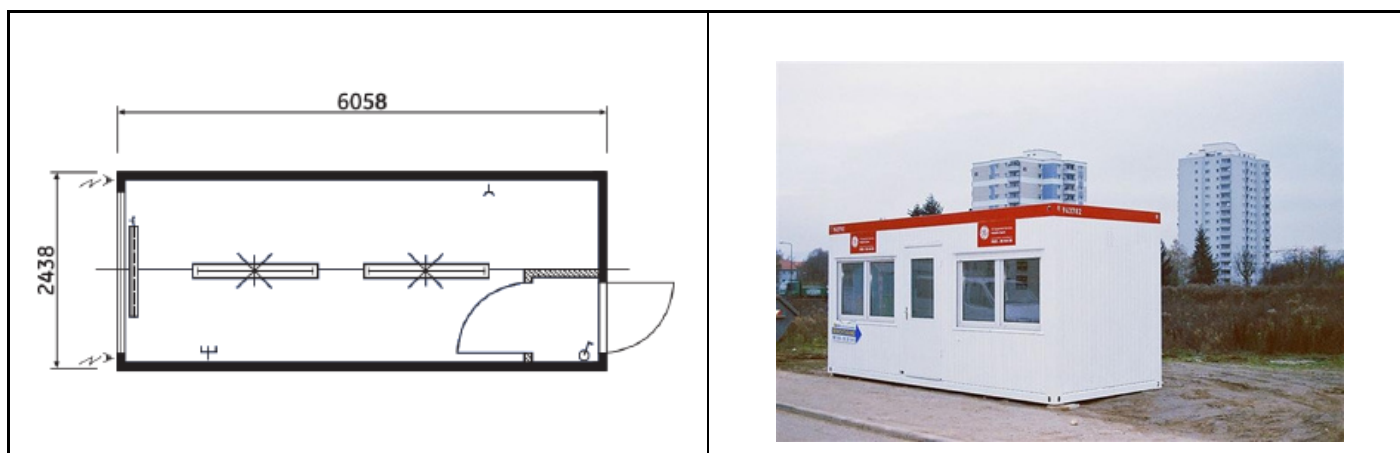

External dimensions			Internal dimensions		
Length	6,058	[m]	Length	5,930	[m]
Width	2,438	[m]	Width	2,310	[m]
Height	2,800	[m]	Height	2,500	[m]
Area	14,75	[m ²]	Area	13,70	[m ²]
Technical description					
Construction	- steel structure made from rolled sections, painted in RAL 1015 / RAL 9010		Windows	- plastic window profiles, dimensions: 200/122 cm, colour: white, double-sash (2), 1 x tilt-and-turn sash, plastic blinds with a locking mechanism, glazing: 4/12/4	
Roof	- profiled sheet metal - girders made from steel sections - ventilated flat roof - rainwater drainage via downpipes - 80 mm thick mineral wool insulation - finished on the inside with 10 mm thick laminated panels - permissible roof load: 1000 N/mk		External doors	- a door measuring 875 x 2140 [mm], with handles and a mortise lock	
Floor	- steel grating with a load-bearing capacity of 200 kg/m² - floor panel, 19 mm thick - 100 mm mineral wool insulation - 1.5 mm thick PVC floor covering, beige (marble effect), fully bonded, with heat-sealed joints		Internal doors	- panelled door, dimensions: 875 x 2000 [mm]	
External walls	- galvanised profiled sheet metal - structure made from galvanised steel sections, 70 mm high - 80 mm thick mineral wool insulation, with a 10 mm thick board laminated on both sides		Electrical installation	- supplied with a junction box, a distribution box containing 0.03 A switches and circuit breakers, 2 strip lights (58W) with shades, 2 plug sockets, 1 radiator socket and 1 switch	
Portion walls	- can be made to the customer's specifications		Heating	- a 2 kW electric convector heater	